


5,6 TON/KVM


5,6 TON/KVM

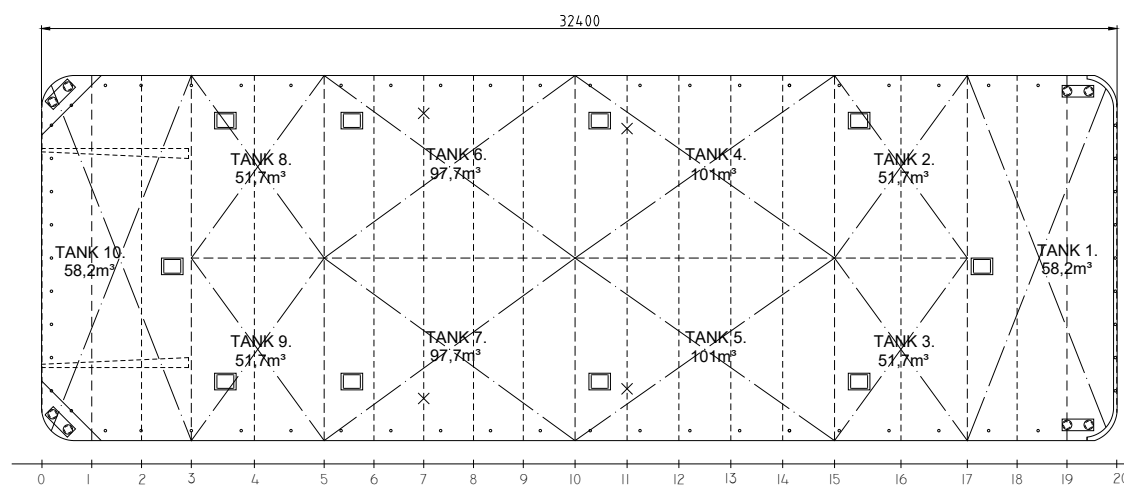

× = Pillar below, Ø 141

— Bulkhead watertight

--- Web frames

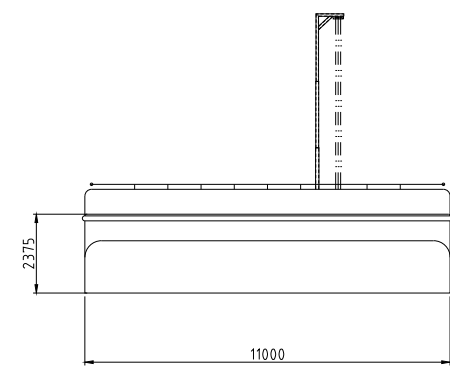

KAPACITETSPLAN ALFRED
 -MAX DJUPGÅENDE 2,0 METER
 -MAXIMAL UTBREDD LAST
 5,6 TON/KVM FÖR #3-5 + #15-17
 7,4 TON/KVM FÖR ÖVRIG DÄCKSYTA.

- NOTES:
 1 Frames 2,6,8,12,14,16,18: Beam top/bottom 500x200x10x16
 2 Frames 4,7,9,11,13: Beam top/bottom 670x320x10x20.

DIMENSIONS:
 Length: 32,4 m
 Breadth: 11,0 m
 Dept: 2,35 m

Rev.	Date	Description	Made by	Chk'd by	Disc. by	Client Appr.
PROJECT :		PROJECT NO. :	CUSTOMER :			
TITLE :		SCALE :	DATE :		CONTR. :	
ALFRED		1: 100 (A2)				
KAPACITETSPLAN			DRAWING NO. :	REV.:		
			2025-01-23	I		
REPLACES :			REPLACED BY :			